


Features

- High quality steel (44W OR HARDOX WEARPLATE) much more robust than regular steel.
- 1.5" Round Tines
- Hydraulic Hose Support.
- Dual Steps available.
- **Full Tine visibility**
- Independent grapple for securing uneven loads
- Heavily reinforced quick attach
- Cylinder protection with checkered plate, also protect hydraulic hoses.
- Removable, replacable tines.
- Grapples can be removed in less than ten minutes, for standard rock bucket use.
- **FULLY CUSTOMIZABLE**

Manure / Tine Grapple

This attachments is mainly design in moving straw or manure. The tines allow bucket to grab large loads without the inconvienience of a cutting edge. Also featuers the indepenant grapple system for securing uneven loads.

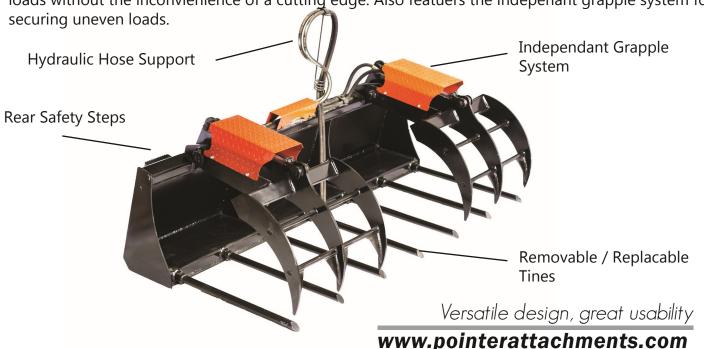



Options

68" Model (TBG68)

72" Model (*TBG72*)

80" Model (TBG80)

Add-ons

Bolt on reversible cutting edge

Bolt on removable teeth

Bolt on tooth bar



Model	TBG68	TBG72	TBG80
Weight	450	495	593
Width	60	66	80
Height	21	21	21
Struck	N/A	N/A	N/A
Frog	N/A		
Tines	Replaceable 1.5" tines		
Wear Bars	AR200 Wear Steel		
1/4 Bucket Back	High Grade 44W Steel		

